

# Deye Cloud App

## Wi-Fi Configuration Operation Manual

NINGBO DEYE INVERTER TECHNOLOGY Co.,LTD


Add: No.26, YongJiang Road, Beilun, NingBo, 315806, China.

Customer Service E-mail: [cloudservice@deye.com.cn](mailto:cloudservice@deye.com.cn)

## Method 1: Wi-Fi Configuration by Using Bluetooth


Part of devices supports this method.

Step 1: Tap on “” in the upper right corner, select “Wi-Fi configuration” and automatically jump to the page for scanning nearby devices;

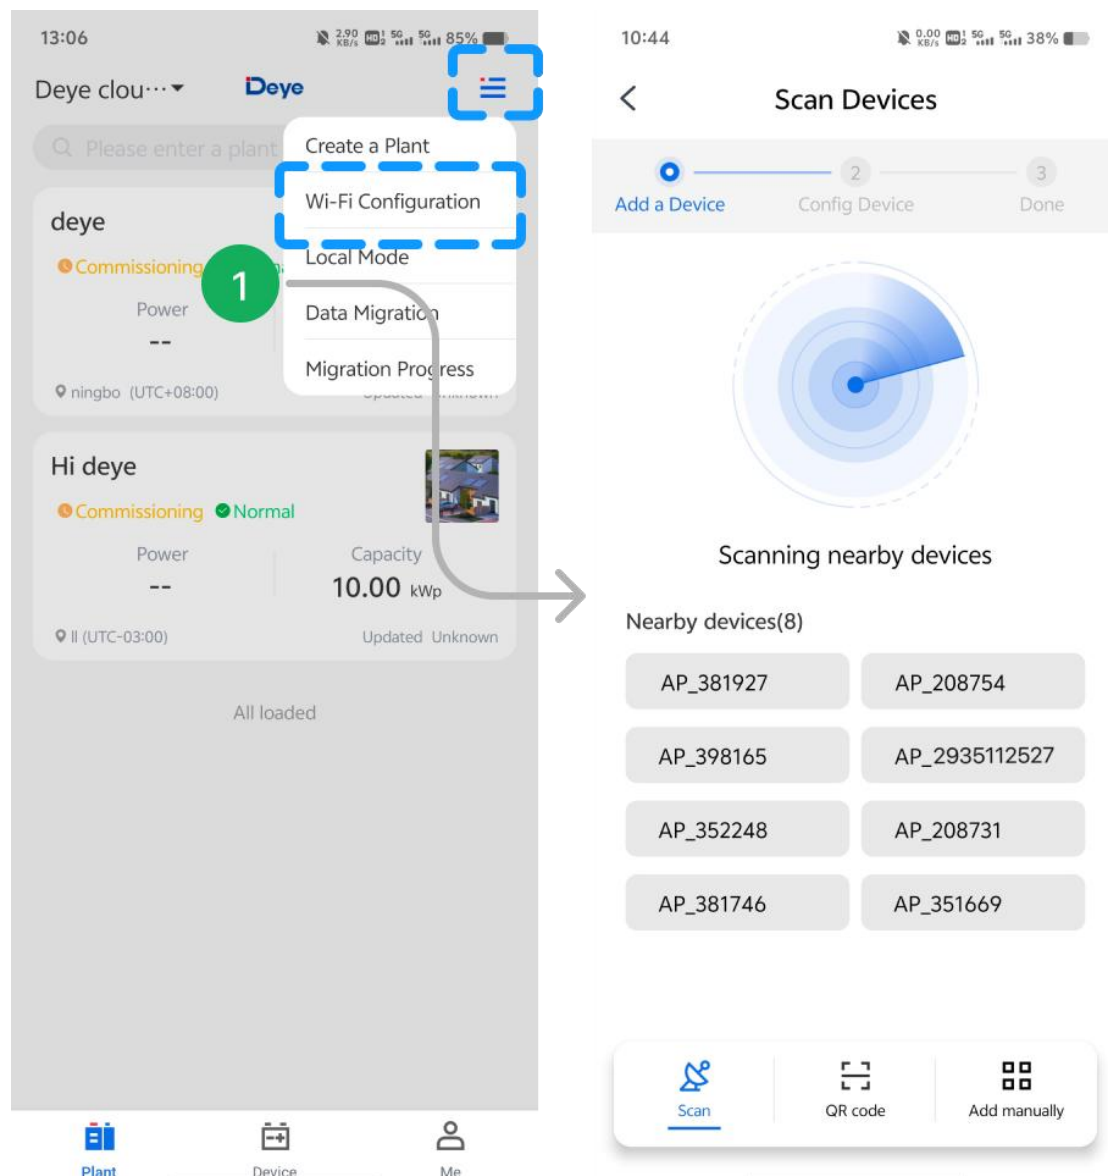


Step 2: Select an AP of device to embark on Wi-Fi configuration;

Step 3: Select an available 2.4G network, enter it's password and tap on “Next” ;

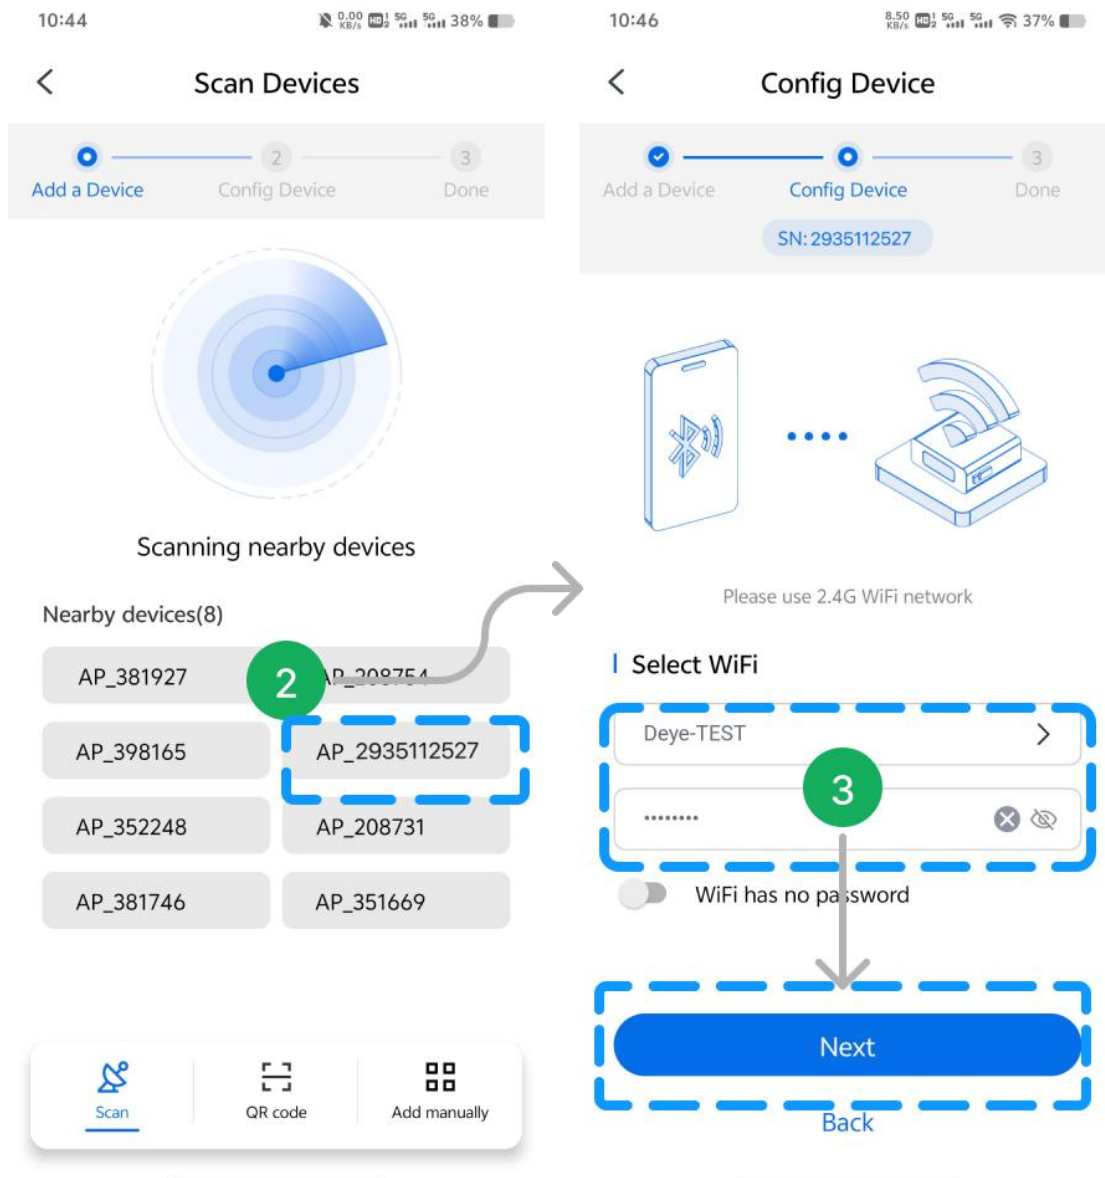

Step 4: Wi-Fi configuration is in process (Please don't leave this page and place your phone near the devices);


Step 5: After Wi-Fi configuration done, you could enter a personalized device name and tap on "Complete" to end the configuration.

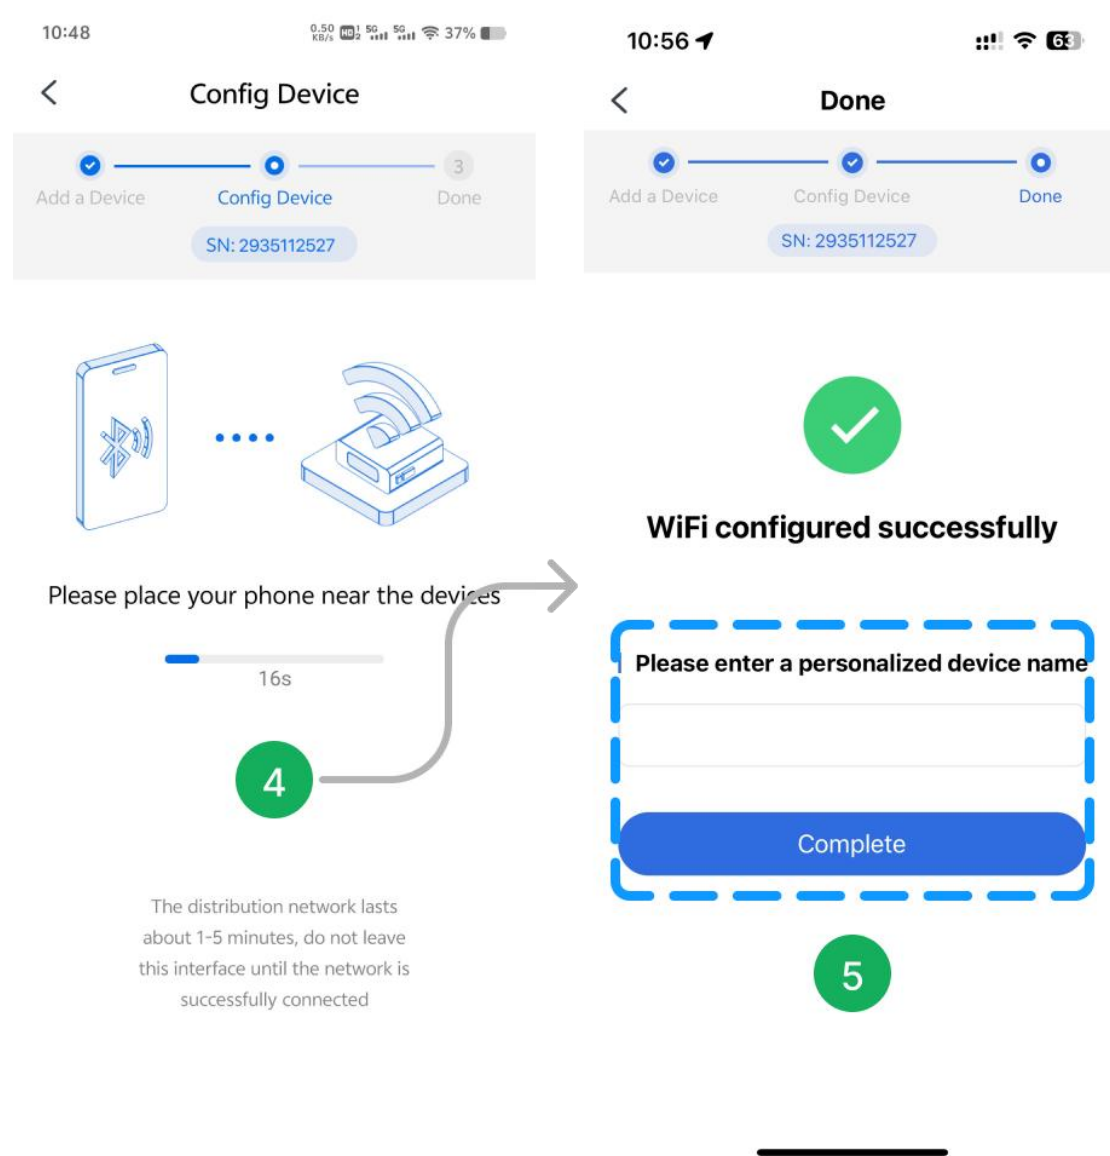

## Method 2: General Wi-Fi Configuration

Part of devices without Bluetooth function support Wi-Fi configuration by scanning QR code or manually entering SN of logger.

Step 1: Tap on “QR code” or “Add manually” jumping to the corresponding page;

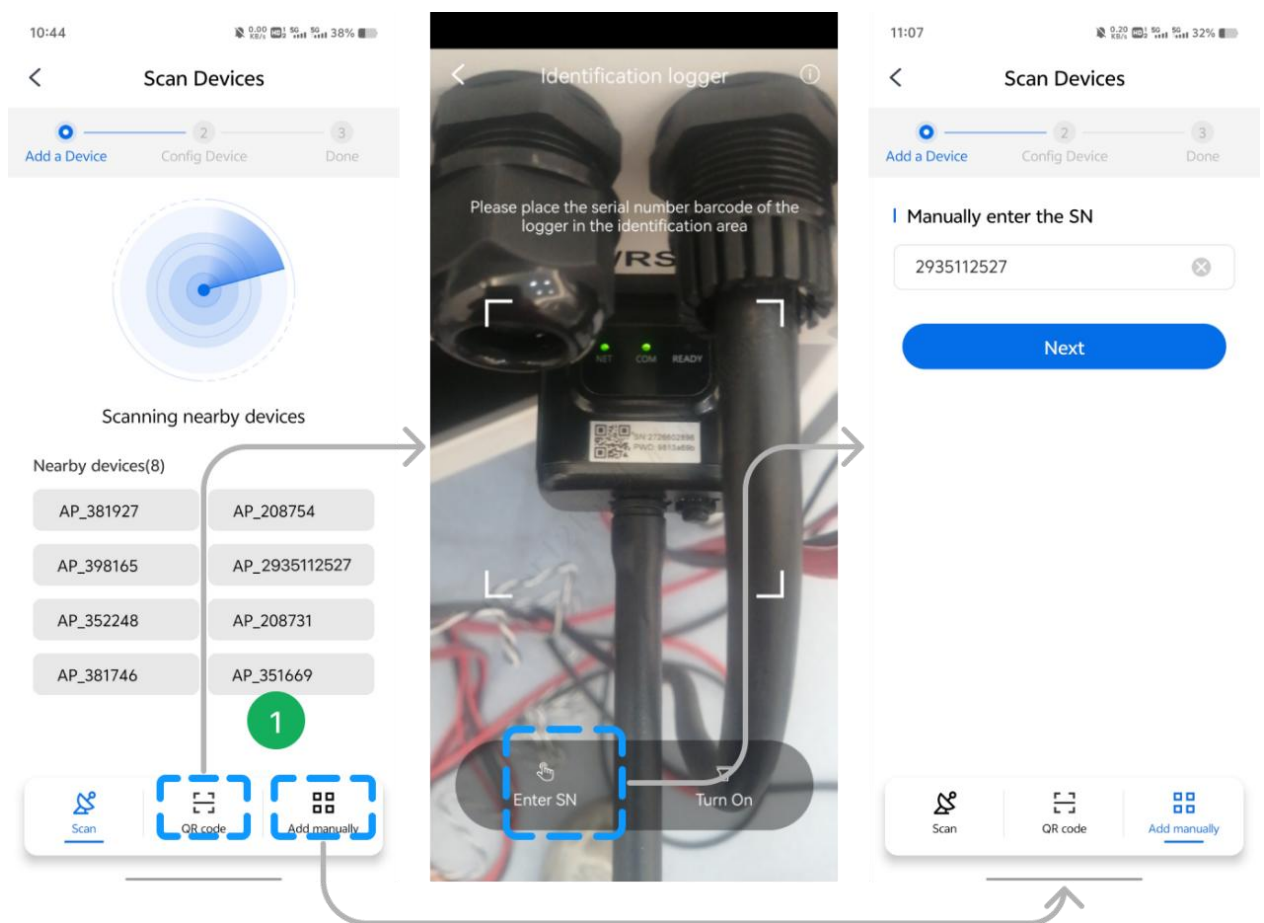


Step 2: After Scanning QR code or entering the SN, system will jump to the Wi-Fi configuration page;

In addition, the Logger in the Device page of the plant could also support Wi-Fi configuration by tapping on "Wi-Fi configuration"

Step 3: Jump to the Wi-Fi configuration page, APP will default to obtaining the present network connected with the phone.


“Switch Network” is optional and the other currently available wireless network could be switched manually;

Step 4: Enter the password for the WLAN;

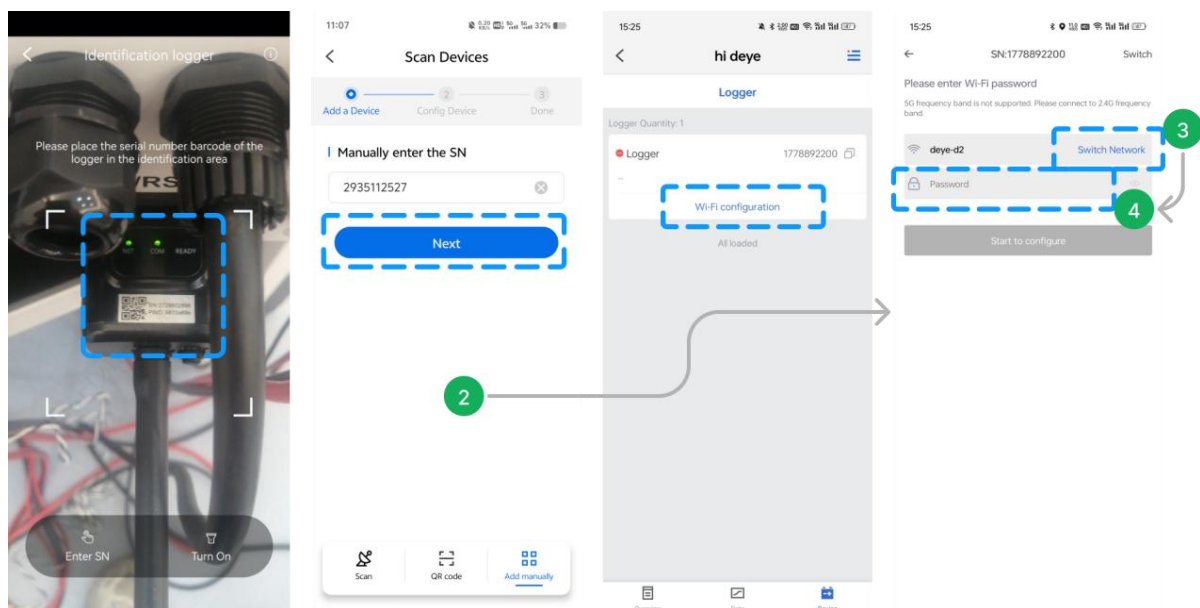

Step 5: Tap on “Start to configure”;


Step 6: Automatically embark on Wi-Fi network test;

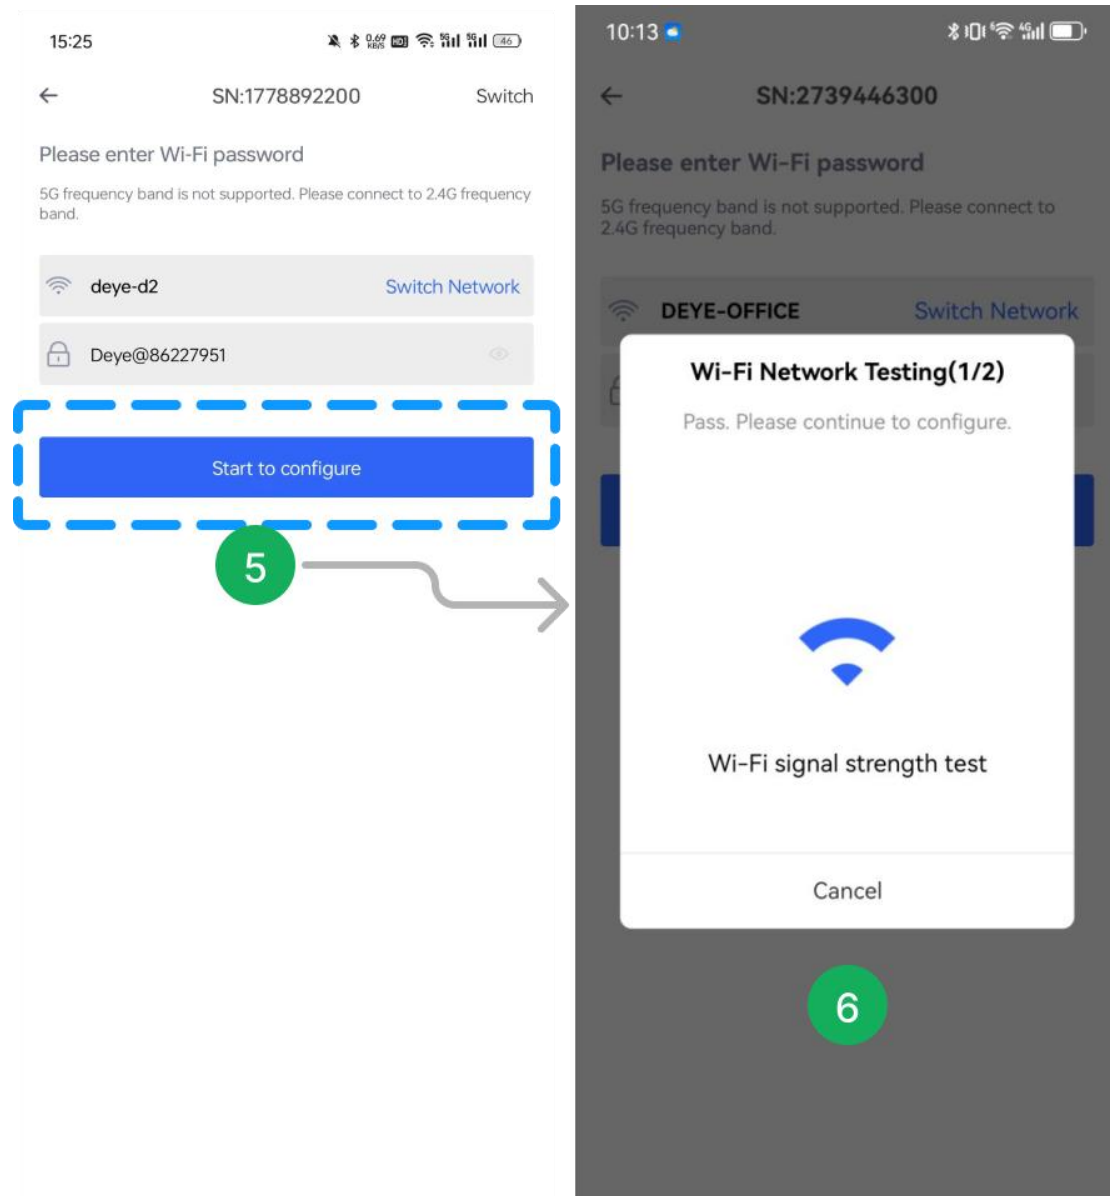

Step 7: Tap on “Connect” to configure logger in the WLAN;

Step 8: Select the WLAN (AP+SN) prompted by the system and enter the password on the logger;

Step 9: Tap on “←” and back to APP;

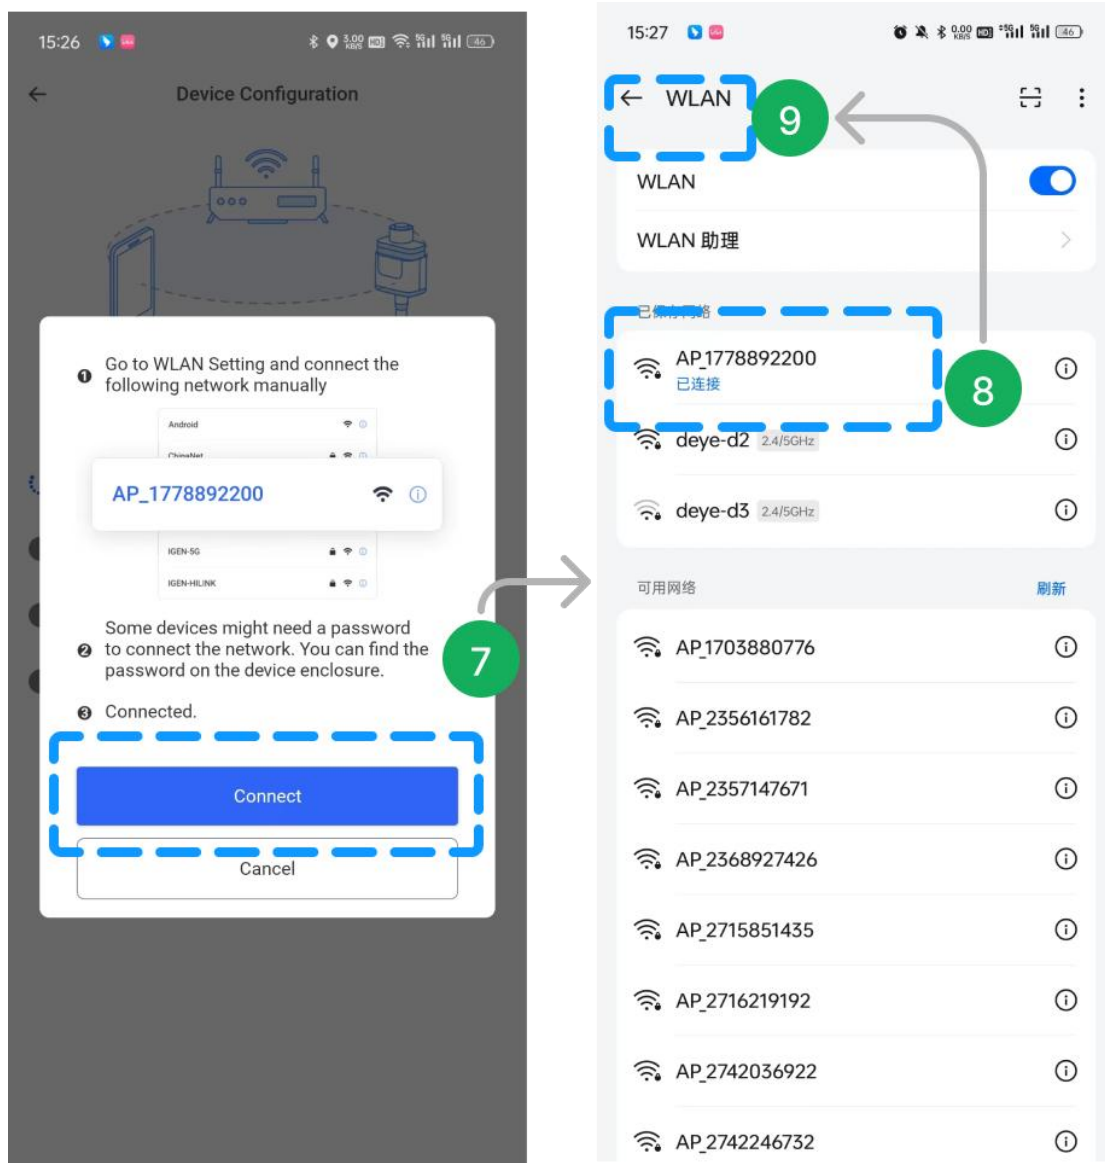

Step 10: Connect to device, Configuring, Restart and Verified are Sequentially executed;

Step 11: After the page displaying “Configuration succeeded” , tap on “Done” to close the page and back to the device list.

